

**xtra** Strong Platform  
Gear Box Performance  
Long Clutch Life

Yani **xtra** Profit



**Xtra chalao, Xtra kamao!**

For details  
SMS ape3  
to 56677

Also available  
in standard deck size

TOLL FREE HELPLINE  
**1800-121-0007**



Maximum  
mileage



Lowest  
operating cost



Highest  
loadability



World class  
customer care

**apé<sup>®</sup>**  
**xtra**


also available in  
**BSIII**

Maximum Mileage • Lowest Operating Cost • Highest Loadability • World Class Customer Service



**Xtra Strong Platform**

Cold rolled loading tray with additional reinforcement, which enhances strength, resulting in better life of loading tray

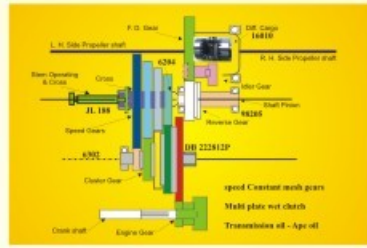

**Xtra Reliable Gearbox**

New extra robust gearbox gives you extra performance & reliability.



**Xtra Long Clutch Life**

Upgraded clutch that withstands extra torque, enhances clutch life & saves on maintenance cost.



**Xtra Engine-Oil Life**

New special oil - "ape life" provides 10,000 km of drain period, which reduces maintenance cost by 50%.



**Xtra Aesthetics**

Sleek & smart console, designed for visual appeal and convenience. Extra long seat for driver's comfort.



**Xtra Profits**

With improved features that reduce maintenance cost and maintains the high performance standard of the vehicle; ape xtra LD is designed to deliver on every aspect - including extra profits.

• Also available in Hi-Body, Delivery & Pickup versions

• Also available in CNG & LPG fuel variants

**Technical Specifications**

	apé xtra BSII	apé xtra BSIII		
<b>Engine</b>				
Type	Single Cylinder, Naturally Aspirated Air Cooled	Single Cylinder, Naturally Aspirated Air Cooled		
No. of cylinders	One	One		
Displacement	395 cc	436 cc		
Maximum Power, kW@rpm	7.38 bhp @ 3600 rpm ± 50 rpm	5.52 kW @ 3600 rpm ± 50 rpm		
Maximum Torque, Nm @rpm	16.7 Nm @ 2500 rpm	18 Nm @ 2400-2200 rpm		
Compression Ratio	18 : 1 [± 0.5%]	19 : 1 [± 0.5%]		
<b>Clutch Type</b>	Multi Disc, Wet type			
<b>Gear Box</b>	Constant Mesh G.B. with 4 Forward + 1 Reverse			
<b>Suspension</b>				
Front	Helical spring with Hydraulic telescopic Shock absorber			
Rear	Rubber compression spring with Hydraulic telescopic Shock absorber			
Steering	Handle Bar Type			
<b>Brakes</b>	Drum brakes hydraulically actuated internal expanding shoe type			
<b>Tyres</b>				
Tyre Size	4.50-10, 8PR			
Tyre Type	Cross/Tube			
<b>Electrical System</b>				
System voltage, V	12DC			
Battery rating, Ah	50 Ah			
Wiping System	Electrically Operated			
<b>Fuel tank capacity</b>	10.5 Ltr			
<b>Dimensions (in mm)</b>	<b>Xtra DV</b>	<b>Xtra DAC</b>	<b>Xtra HB</b>	<b>Xtra Pick-up</b>
Wheel base, mm	1920	1920	1920	1920
Overall width, mm	1495	1490	1490	1490
Overall length, mm	2965	2965	2965	2965
Overall height, mm	1750	1635	1750	1635
Rear track, mm	1260	1260	1260	1260
Min. ground clearance, mm	240	240	240	240
Cargo Box Dimensions, mm	1480L x 1400W x 1065H (for DV only)			
Load Body Platform Area, mm	1480L x 1400W			
<b>Weight</b>	<b>Xtra DV</b>	<b>Xtra DAC</b>	<b>Xtra HB</b>	<b>Xtra Pick-up</b>
Maximum GVW, kg	975	975	975	975
Kerb weight, kg	440	400	435	415
Payload, Kg	535	575	540	560

UNIQUE



EXTENDED WARRANTY

**apé<sup>®</sup>**  
**xtra**

also available in  
**BSIII**